


NEW!



FLEX YOUR COVERAGE

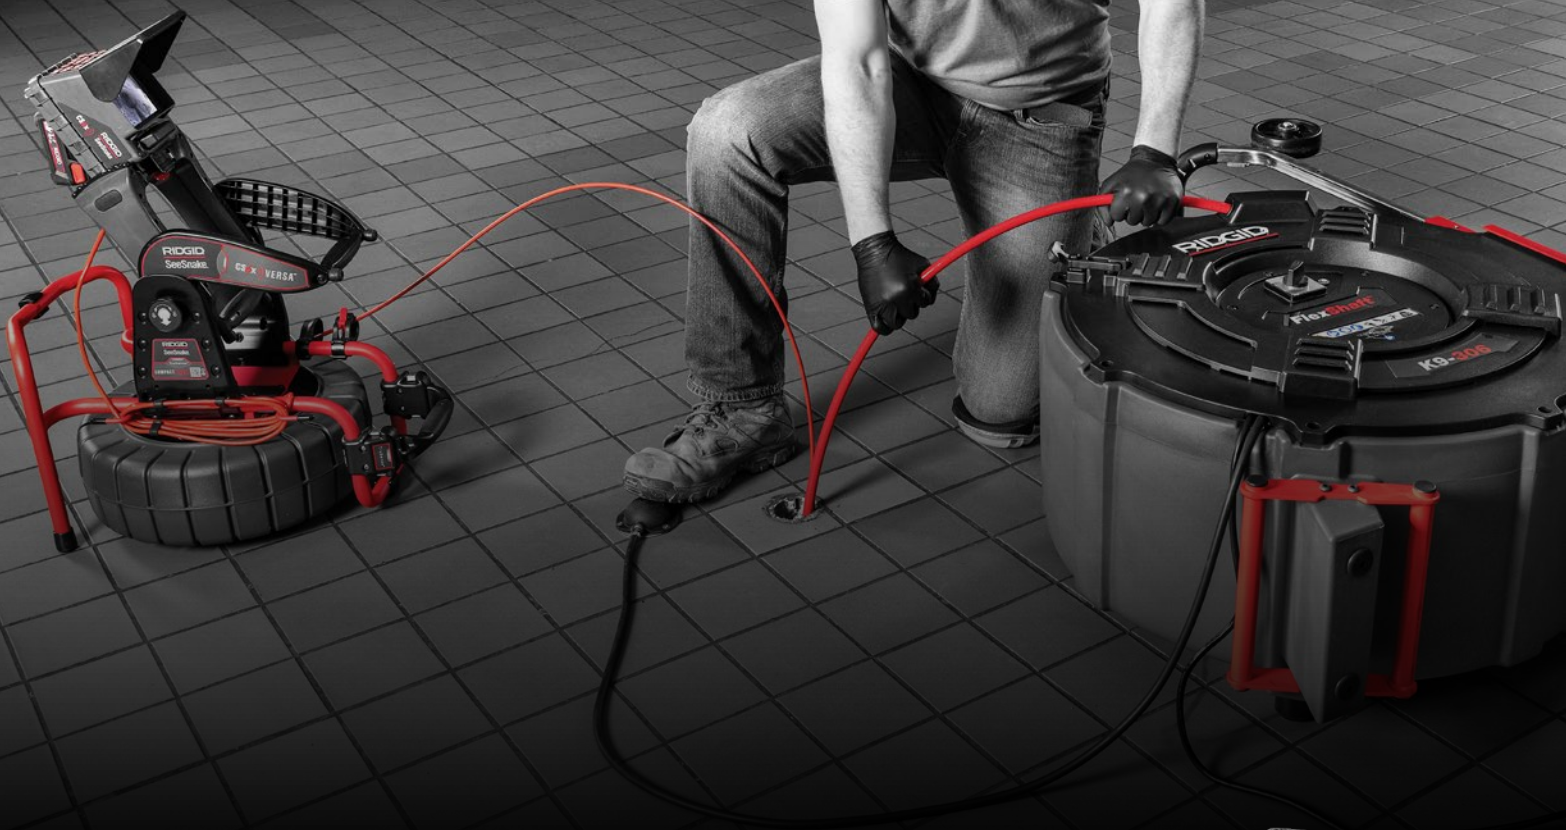

RIDGID FlexShaft machines deliver wall-to-wall clean in 1¼" to 6" (32 to 150 mm) lines from 50' to 125' (15 to 38 m). Designed with portability and efficiency in mind, these machines provide in-and-out speed that gets you from job to job faster. Perfect for clearing grease, sludge, small tree roots and soft blockages, FlexShaft machines are the trusted choice by drain cleaning professionals.

HIGH SPEED DRAIN CLEANING

K9-306 FLEXSHAFT MACHINE

CLEARs FROM 3" TO 6" (75 - 150 MM) DRAIN LINES

Purpose-built for the professional, the RIDGID® FlexShaft K9-306 quickly clears grease buildup, roots and heavy scale using 125' (38 m) of 3/8" (10 mm) cable with one step of the foot switch. It features a professional 1.5 HP (1119 W) internal universal motor for maximum power and longevity, a fully enclosed drum to minimize set-up and clean up time, and a telescoping handle with multiple wheels and grab points to make loading, unloading, transporting, and storage easy.

▶ WALL-TO-WALL CLEAN

Chain knockers expand for full pipe cleaning.

▶ EASY TRANSPORT

K9-102 & K9-204's lightweight construction allow you to easily move around the jobsite. Utilize 2 or all 4 wheels of the K9-306's versatile frame for ease of maneuverability and transport.

▶ ELECTRONIC CLUTCH

For optimal operation in heavier blockages.



(TOOLTIP)

Always use with K9-102 & K9-204 FlexShaft models a cordless drill equipped with an adjustable clutch.

SPECIFICATIONS:

Model	K9-102	
Drain Capacity	1 1/4" to 2" (32 - 50 mm)	
Cable Diameter (without Sheath)	1/4" (6 mm)	
Cable Assy. Diameter (with Sheath)	3/8" (9,5 mm)	
Cable Assembly Length	50' (15,2 m)	
Rotational Speed	Min. 1800 RPM – Max. 2	
Power	Powered by Cordless Drill* (Attachm	
Weight (without Drill/Knocker)	24.3 lbs. (11,0 kg)	
Dimensions (without Drill)	19,2" x 7,5" x 22,1" (488 x 191 x 562 mm)	2
Operating Temperature		

* Cordless drill (with an adjustable Clutch) not included

K9-102 AND K9-204 FLEXSHAFT MACHINES

CLEARNS FROM 1¼" TO 4" (32 - 100 MM) DRAIN LINES

These lightweight, compact machines deliver wall-to-wall clean in drain lines up to 70' (21 m). Specialized chain knockers are spun at high speeds by a cordless drill (equipped with a clutch) attached to the center drive shaft. The flexible cable is housed in durable nylon sheath to navigate tight turns and long runs, while a fully contained system means less jobsite mess.



▶ SIMULTANEOUS CAMERA USE

FlexShaft machines let you keep your camera in-pipe while you work.

▶ TIME SAVER

Fully enclosed system for high speed cleaning action, fast setup and cleanup. Increased productivity on the jobsite.

▶ CUSTOMIZE YOUR MACHINE

A full range of chain knockers and accessories are available.

K9-204	K9-306
2" to 4" (50 - 100 mm)	3" to 6" (75 - 150 mm)
5/16" (8 mm)	3/8" (10 mm)
1/2" (12,7 mm)	5/8" (16 mm)
70' (21,3 m)	125' (38,1 m)
2500 RPM	2000 RPM
Mount 5/16" Hex (8 mm)	Internal Power, 1.5 HP (1119 W)
38.2 lbs. (17,3 kg)	159 lbs. (72,1 kg)
11,1" x 10,8" x 24,2" (536 x 274 x 615 mm)	36,2" x 20,4" x 32,6" (919,5 mm x 518 mm x 828 mm)
-6°C to 60°C	



(TOOLTIP)

Use the Flexshaft lubricant to lubricate sheath for pushing the cable easier and lubricate exposed cable periodically (every couple weeks) to ensure longer lasting cable ends.

RIDGID® FlexShaft machines utilize specialized accessories attached to a flexible cable that are spun at high speeds for effective wall-to-wall cleaning action. Selecting the correct chain knocker or brush for your application and pipe-material will ensure an efficient clean-out.

ORDERING INFORMATION:

Catalog No.	Model No.	Description	Weight	
			lb.	kg
64268	K9-102 GLOBAL	FlexShaft, 1¼" to 2" (32 - 50 mm) Includes: 50' (15,2 m) of ¼" (6 mm) cable and kit*	29.5	13,4
64278	K9-204 GLOBAL	FlexShaft, 2" to 4" (50 - 100 mm) Includes: 70' (21,3 m) of 5/16" (8 mm) cable and kit**	44.4	20,1
66598	K9-306 110V - UK	FlexShaft, 3" to 6" (75 - 150 mm) Includes: 125' (38 m) of 3/8" (10 mm) cable and kit***	159	72,1

* K9-102 includes: K9-102 32 mm (1¼") & K9-102 50 mm (2") Knockers, FlexShaft 4 oz (118 ml) Lubricant, PVC 32 mm (1¼") & PVC 40 mm (1½") Wallpipe Attachments, Hex Key 4 mm T-handle Tool, Hex Key 3 mm T-handle Tool, Sheath Stock, RIDGID Tool Bag, K9-102 & K9-204 Manual Pack.

** K9-204 includes: K9-204 50 mm (2") & K9-204 100 mm (4") Knockers, FlexShaft 4 oz (118 ml) Lubricant, Hex Key 4 mm T-handle Tool, Hex Key 3 mm T-handle Tool, Sheath Stock, RIDGID Tool Bag, K9-102 & K9-204 Manual Pack.

*** K9-306 includes: K9-306 100 mm (4") & K9-306 150 mm (6") Knockers, FlexShaft 4 oz (118 ml) Lubricant, Hex Key 4 mm Tool, Hex Key 3 mm Tool, Sheath Stock, RIDGID Tool Bag, K9-306 Manual Pack.

ACCESSORIES:

Model No.	Catalog No.	Description
K9-102 (¼" (6 mm) cable)	64293	FlexShaft Knocker, for 1¼" - 2" (32 - 50 mm) pipe, single chain
	64298	FlexShaft Knocker, for 2" (50 mm) pipe, 2 chain
	64283	FlexShaft Knocker, for 1¼" - 2" (32 - 50 mm) pipe, single chain, carbide tip
	64288	FlexShaft Knocker, for 2" (50 mm) pipe, 2 chain, carbide tip
	66568	FlexShaft Knocker, for 1¼" - 2" (32 - 50 mm) pipe, single chain, penetrating head & carbide tips
	66573	FlexShaft Knocker, for 1½" - 2" (40 - 50 mm) pipe, 2 chain, penetrating head & carbide tips
	64343	FlexShaft ¼" (6 mm) Cable Assembly (includes 50' (15.2 m) cable, sheath, couplings)
	64643	FlexShaft Sheath Accessory, for K9-102, ¼" (6 mm), Stk, 12" (30,4 cm)
	64363	Wallpipe Accessory, for 1¼" (32 mm) pipe
64368	Wallpipe Accessory, for 1½" (40 mm) pipe	
64338	RIDGID FlexShaft Lubricant, 8 oz (237 ml)	
K9-204 (5/16" (8 mm) cable)	64323	FlexShaft Knocker, for 2" (50 mm) pipe, 2 chain
	64328	FlexShaft Knocker, for 3" (75 mm) pipe, 3 chain
	64333	FlexShaft Knocker, for 4" (100 mm) pipe, 3 chain
	64308	FlexShaft Knocker, for 2" (50 mm) pipe, 2 chain, carbide tip
	64313	FlexShaft Knocker, for 3" (75 mm) pipe, 3 chain, carbide tip
	64318	FlexShaft Knocker, for 4" (100 mm) pipe, 3 chain, carbide tip
	66578	FlexShaft Knocker, for 2" (50 mm) pipe, 2 chain, penetrating head & carbide tips
	66583	FlexShaft Knocker, for 3" (75 mm) pipe, 3 chain, penetrating head & carbide tips
	66588	FlexShaft Knocker, for 4" (100 mm) pipe, 3 chain, penetrating head & carbide tips
	64348	FlexShaft 5/16" (8 mm) Cable Assembly (includes 70' (21.3 m) cable, sheath, couplings)
	64648	FlexShaft Sheath Accessory, for K9-204, 5/16" (8 mm), Stk, 12" (30,4 cm)
	64338	RIDGID FlexShaft Lubricant, 8 oz (237 ml)
K9-306 (3/8" (10 mm) cable)	66618	FlexShaft Knocker, for 3" - 4" (75 - 100 mm) pipe, 3 chain
	66623	FlexShaft Knocker, for 4" - 5" (100 - 125 mm) pipe, 3 chain
	66628	FlexShaft Knocker, for 5" - 6" (125 - 150 mm) pipe, 3 chain
	66633	FlexShaft Knocker, for 3" - 4" (75 - 100 mm) pipe, 3 chain, carbide tips
	66638	FlexShaft Knocker, for 4" - 5" (100 - 125 mm) pipe, 3 chain, carbide tips
	66643	FlexShaft Knocker, for 5" - 6" (125 - 150 mm) pipe, 3 chain, carbide tips
	66648	FlexShaft Knocker, for 3" - 4" (75 - 100 mm) pipe, 3 chain, penetrating head & carbide tips
	66653	FlexShaft Knocker, for 4" - 5" (100 - 125 mm) pipe, 3 chain, penetrating head & carbide tips
	66658	FlexShaft Knocker, for 5" - 6" (125 - 150 mm) pipe, 3 chain, penetrating head & carbide tips
	66663	FlexShaft 3/8" (10 mm) Cable Assembly (includes 125' (38,1 m) cable, sheath, couplings)
	66668	FlexShaft Sheath Accessory, for K9-306, 3/8" (10 mm), Stk, 12" (30,4 cm)
	64338	RIDGID FlexShaft Lubricant, 8 oz (237 ml)



CHAIN KNOCKERS

- All pipe types
- For soft blockages and grease



CARBIDE TIPPED CHAIN KNOCKERS

- Hard walled pipes
- For soft blockages, grease, scale and roots



PENETRATING & CARBIDE TIPPED CHAIN KNOCKERS

- Hard walled pipes
- For soft blockages, grease, scale, roots and wipers



NYLON BRUSH

- Nylon material for gentle cleaning of fragile pipes



NYLON AND STEEL BRUSH


- Nylon-Steel material for cleaning & light grinding



Scan QR for the complete range of accessories



For more details visit RIDGID.com/warranty



RIDGID® reserves the right to change design and specification of our products without notification or alteration of literature. For the complete selection of the Ridge Tool product line, please refer to the RIDGID® Tool Catalog or RIDGID.com.

© 2020, RIDGID, Inc. The Emerson logo and RIDGID logo are registered trademarks of Emerson Electric Co. or RIDGID, Inc. in the U.S. and other countries. All other trademarks belong to their respective holders.

DISTRIBUTOR



Ridge Tool Europe N.V.
Ondernemerslaan 5428
B-3800 Sint-Truiden
Belgium

Tel.: +32 (0)11 598 620
RIDGID.benelux@emerson.com
RIDGID.com

